


## Flüssiggas (LPG)

Druckverlust Pa/m	Q <sub>NB</sub> [kW]			
	DN 12	DN 15	DN 20	DN 25
R				
0,4		3	5	9
0,6			6	11
0,8		4		13
1,0			7	15
1,2			8	17
1,4		5	9	18
1,6				19
1,8			10	21
2,0		6		22
2,5			12	25
3,0	3	7	13	27
3,5		8	14	30
4,0			15	32
5		9	16	36
6	4	10	18	40
7		11	20	43
8		12	21	46
9	5		22	49
10		13	23	52
12		14	26	58
14	6	15	28	63
16		17	30	67
18	7	18	32	72
20			33	76

empfohlener Bereich

(1 Pa = 0,01 mbar)

## Flüssiggas (LPG)

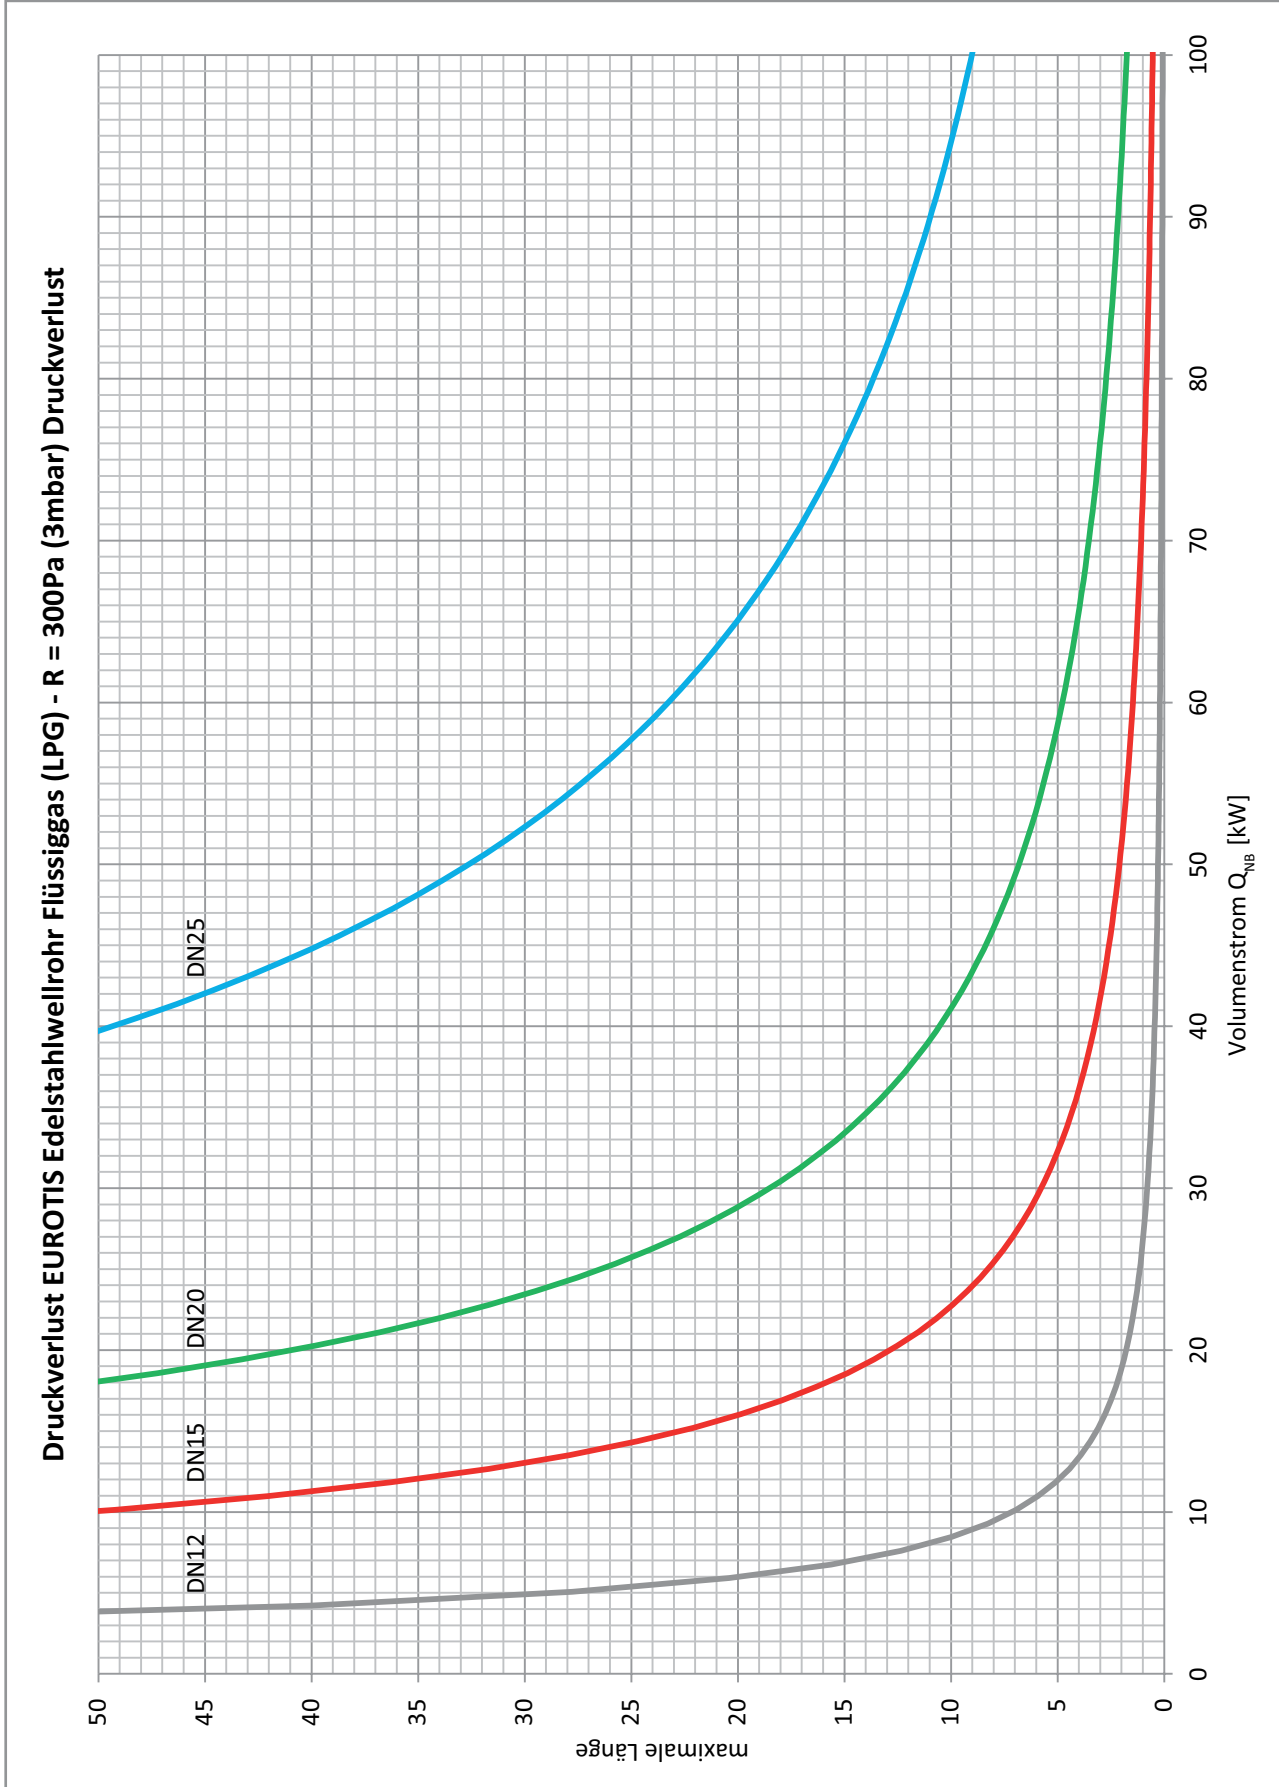

Artikel. Nr. U50 010114