


Description:	EUROTIS ePress System transition piece from EUROTIS corrugated pipe with EPDM seal via press fitting onto external pipe thread
Part.#:	see table below
Material:	dezincification resistant brass (CW617N)
Thread:	EN 10226 R
Operating temperature:	Max. 150°C
Manufacturer:	EUROTIS
Customs code:	74122000
Country of origin:	IT
REACH, ROHS, Building Products Regulations:	Not applicable
UBA Positive List:	Not approved for use with drinking water
DVGW certified uses:	 Solar and heating

Part.#	GTIN	DN	AG (Inch)	L (mm)	id (mm)	SW (mm)	Weight (kg/Pce.)
EPAG12	4250289307079	12	R 1/2	46,5	12,0	19	0,040
EPAG15	4250289307086	15	R 1/2	54,5	15,6	19	0,060
EPAG20	4250289307093	20	R 3/4	60,0	19,1	24	0,104
EPAG25	4250289307109	25	R 1	69,7	25,0	30	0,180
EPAG32	4250289307116	32	R 1.1/4	70,0	33,6	54	0,320

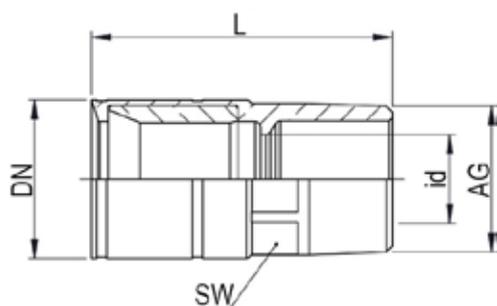

Further Resources

Technical Information EUROTIS CSST:

<https://wiki.leifeld.de>

Leifeld Order system:

<https://www.leifeld.de>