


<b>Description:</b>	EUROTIS ePress System transition piece from EUROTIS corrugated pipe with EPDM seal via press fitting onto internal pipe thread
<b>Part.#:</b>	see table below
<b>Material:</b>	dezincification resistant brass (CW617N)
<b>Thread:</b>	EN 10226 R
<b>Operating temperature:</b>	Max. 150°C
<b>Manufacturer:</b>	EUROTIS
<b>Customs code:</b>	74122000
<b>Country of origin:</b>	IT
<b>REACH, ROHS, Building Products Regulations:</b>	Not applicable
<b>UBA Positive List:</b>	Not approved for use with drinking water
<b>DVGW certified uses:</b>	 Solar and heating

Part.#	GTIN	DN	AG (Inch)	L (mm)	id (mm)	SW (mm)	Weight (kg/Pce.)
<b>EPIG12</b>	4250289307123	12	Rp 1/2	46,5	12,0	24	0,060
<b>EPIG15</b>	4250289307130	15	Rp 1/2	54,4	15,6	24	0,080
<b>EPIG20</b>	4250289307147	20	Rp 3/4	60,0	19,1	30	0,140
<b>EPIG25</b>	4250289307154	25	Rp 1	69,0	25,0	36	0,210
<b>EPIG32</b>	4250289307161	32	Rp 1.1/4	67,5	33,6	47	0,260

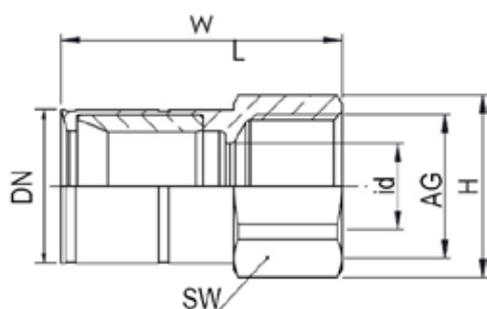

## Further Resources

**Technical Information EUROTIS CSST:**

<https://wiki.leifeld.de>

**Leifeld Order system:**

<https://www.leifeld.de>