


<b>Description:</b>	EUROTIS ePress System transition piece from EUROTIS corrugated pipe with EPDM seal via press fitting onto union nut.
<b>Part.#:</b>	see table below
<b>Material:</b>	dezincification resistant brass (CW617N)
<b>Thread:</b>	ISO 228 G
<b>Operating temperature:</b>	Max. 150°C
<b>Manufacturer:</b>	EUROTIS
<b>Customs code:</b>	74122000
<b>Country of origin:</b>	IT
<b>REACH, ROHS, Building Products Regulations:</b>	Not applicable
<b>UBA Positive List:</b>	Not approved for use with drinking water
<b>DVGW certified uses:</b>	 Solar and heating

Part.#	GTIN	DN	IG (Inch)	L (mm)	id (mm)	SW (mm)	Weight (kg/Pce.)
EPFD12	4250289307178	12	G 1/2	45,0	12,0	24	0,070
EPFD15	4250289307185	15	G 3/4	53,0	15,0	30	0,120
EPFD20	4250289307192	20	G 1	60,2	19,1	36	0,180
EPFD25	4250289307208	25	G 1.1/4	70,0	25,0	46	0,300
EPFD32	4250289307215	32	G 1.1/2	75,0	32,0	54	0,390

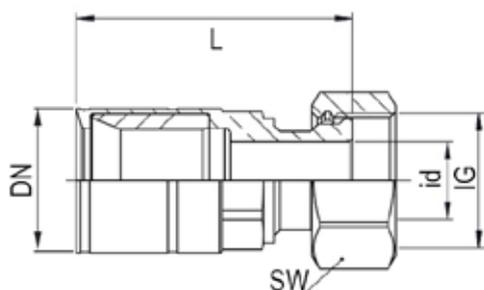

## Further Resources

**Technical Information EUROTIS CSST:**

<https://wiki.leifeld.de>

**Leifeld Order system:**

<https://www.leifeld.de>