


<b>Description:</b>	EUROTIS ePress System transition piece from EUROTIS corrugated pipe with EPDM seal via press fitting to EUROTIS corrugated pipe with EPDM seal
<b>Part.#:</b>	see table below
<b>Material:</b>	dezincification resistant brass (CW617N)
<b>Operating temperature:</b>	Max. 150°C
<b>Manufacturer:</b>	EUROTIS
<b>Customs code:</b>	74122000
<b>Country of origin:</b>	IT
<b>REACH, ROHS, Building Products Regulations:</b>	Not applicable
<b>UBA Positive List:</b>	Not approved for use with drinking water
<b>DVGW certified uses:</b>	 Solar and heating

Part.#	GTIN	DN	DN1	L (mm)	id (mm)	SW (mm)	Weight (kg/Pce.)
<b>EPM12</b>	4250289307079	12	12	55,0	12,0	19	0,050
<b>EPM15</b>	4250289307086	15	15	60,5	15,6	24	0,070
<b>EPM20</b>	4250289307093	20	20	70,0	19,1	30	0,130
<b>EPM25</b>	4250289307109	25	25	79,4	25,0	38	0,210
<b>EPM32</b>	4250289307116	32	32	85,2	33,6	54	0,310

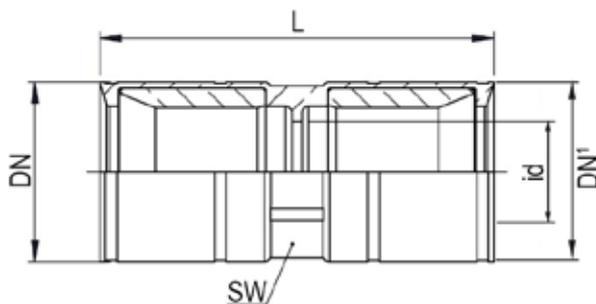

## Further Resources

**Technical Information EUROTIS CSST:**

<https://wiki.leifeld.de>

**Leifeld Order system:**

<https://www.leifeld.de>